

Safety Cleaner

L 500

Parts Cleaner ... for the safe use of solvent cleaners



Advantages

- stable design
- large work surface in ergonomically correct height
- high load capacity for heavy and big parts
- closed loop for the use of the cleaning liquid
- maximum of work safety for the use of a solvent cleaner
- multi-level filter system for coarse and fine particles prolongs the bath lifetime
- complies with all requirements for cleaning equipment for the use of solvents


DENIOS.
ENVIRONMENTAL PROTECTION
& WORK SAFETY

The Safety Cleaner L 500 is exceptionally safe and pleasant to use. Besides its ergonomic design, this cleaning table particularly impresses due to its functional fittings.


Drain valve to discharge used fluid.



Perforated metal plate insert to protect the work surface when cleaning sharp-edged parts (optional).

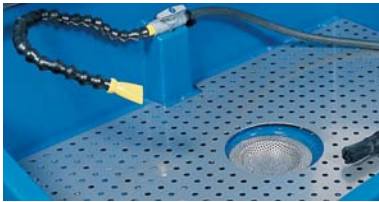

A stable **trolley** enables the parts cleaner to be moved around. It provides enough space for machine and user (optional).

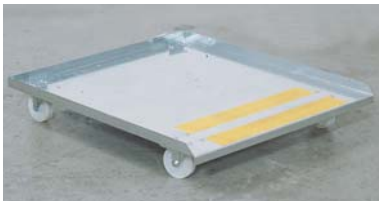

including **lid** to cover the machine after use

Parts can be rinsed by using the **nozzle**. The nozzle can be fixed in the needed position thanks to a versatile jointed hose.



A flow-through **brush** supports the removal of heavy dirt.

The **big work surface** allows for a barrier-free cleaning process.

Filter set with reusable filter (mesh size 250 µm) segregates fine sediment

The **integrated pump** transports the cleaning liquid to the brush and nozzle.

Stable, corrosionproof polyethylene **unit base**

Covered **foot pedal** with self-acting reset device for maximum of safety

Double-walled **cleaning tank** for maximum of stability

Special features

- **electrical fluid pump**
- **its flexible, articulated hose enables parts to be rinsed easily**
- **large tank**
- **protected foot pedal**

The use of a liquid retention system is recommendable in order to comply with water protection laws.

Technical data

	Safety Cleaner L 500
External dimensions W x D x H	1010 x 780 x 1140 mm
Usable surface W x D	930 x 545 mm
Work surface height	950 mm
Load capacity	250 kg
Net weight	55 kg
Optimum liquid level	100 l
Minimum liquid level	60 l
Power input	35 W
Pump	ca. 4 l/min
Permitted solvents	Flammpunkt > 55° C
Article number	178-520

Further Informations:

DENIOS AG | Dehmer Straße 58-66 | D-32549 Bad Oeynhausen
Tel.: +49(0)5731.753-0 | Fax: +49(0)5731.753-199 | www.denios.de

DENIOS
ENVIRONMENTAL PROTECTION
& WORK SAFETY